Neutrino Observations from the Sudbury Neutrino Observatory

A.J. Noble, Carleton University, Ottawa, Ontario, Canada for the SNO Collaboration[a]

Neutrino observations from the Sudbury Neutrino Observatory are presented from preliminary analyses. Based on energy, direction and location, the data in the region of interest appear to be dominated by ^8B solar neutrinos, detected by the charged current reaction on deuterium and elastic scattering from electrons, with very little background. Measurements of radioactive backgrounds indicate that the measurement of all active neutrino types via the neutral current reaction on deuterium will be possible with small systematic uncertainties. Results for the fluxes observed with these reactions will be provided when further calibrations have been completed.

1. INTRODUCTION

This paper presents neutrino observations from the Sudbury Neutrino Observatory [1] (SNO), a 1000 tonne heavy-water Cerenkov detector situated 2 km underground in INCO's Creighton mine near Sudbury, Ontario, Canada. The SNO detector has been filled with water since May, 1999. After a commissioning period, the detector parameters were fixed as of November 1999 and neutrino data acquisition and associated calibrations have been taking place almost continuously since then. In this initial phase of the project, the detector is filled with pure heavy water. Neutrinos from ^8B decay in the sun are observed from Cerenkov processes following these reactions:
1. The Charged Current (CC) reaction, specific to electron neutrinos:

$$d + \nu_e \rightarrow p + p + e^- \quad (1)$$

This reaction has a Q value of -1.4 MeV and the electron energy is strongly correlated with the neutrino energy, providing very good sensitivity to spectral distortions.
2. Neutral Current (NC) reaction, equally sensitive to all non-sterile neutrino types:

$$\nu_x + d \rightarrow n + p + \nu_x \quad (2)$$

With a threshold of 2.2 MeV, this reaction is observed via the detection of neutrons by three different techniques in separate phases of the experiment.
3. Elastic Scattering (ES) reaction:

$$\nu_x + e^- \rightarrow e^- + \nu_x \quad (3)$$

This reaction has a substantially lower cross section than the other two and is predominantly sensitive to electron neutrinos; they have about six times greater cross-section than μ or τ neutrinos.

The SNO plan calls for three phases of about one year each wherein different techniques will be employed for the detection of neutrons from the NC reaction. During the first phase, with pure heavy water, neutrons are observed through the Cerenkov light produced by neutrons captured in deuterium, producing 6.25 MeV gammas. In this phase, the capture probability for such neutrons is about 25% and the Cerenkov light is relatively close to the threshold of about 5 MeV electron energy, imposed by radioactivity in the detector. For the second phase, about 2.0 tonnes of NaCl will be added to the heavy water and neutron detection will be enhanced through capture on Cl, with about 8.6 MeV gamma energy release and about 83% capture efficiency. (See Figure 1). For the third phase, the salt is removed and an array of ^3He- filled proportional counters will be installed to provide direct detection of neutrons with a capture efficiency of about 45%.

2. DETECTOR PERFORMANCE

The SNO detector consists of 1000 tonnes of pure D_2O contained within an acrylic vessel (12 m diameter, 5 cm thick), viewed by 9438 PMT's mounted on a geodesic structure 18 m in diameter, all contained within a polyurethane-coated barrel-shaped cavity (22m diameter by 34 m high). The cavity volume outside the acrylic

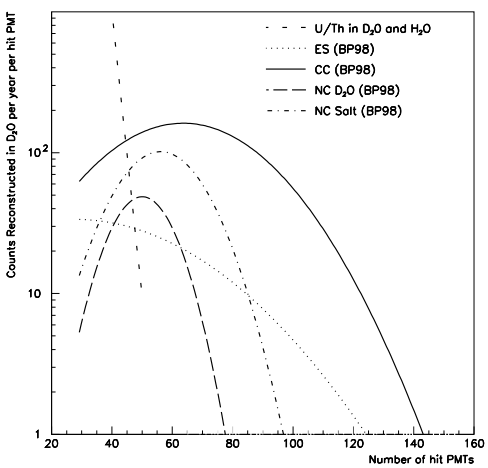

Figure 1. Simulations of spectra obtained from the three detection reactions (CC,ES,NC)for neutrino fluxes as calculated[2] by BP98. Spectra from the NC reaction are shown for pure heavy water and with added salt. The expected counting rate from U and Th radioactivity in the water is also shown. An MeV of electron energy corresponds to about 9 photomultipliers (PMT's) hit.

vessel (AV) is filled with purified H_2O. There are 91 PMT's looking outward from the geodesic structure, viewing the outer H_2O volume.
The SNO detector has been full of water since May, 1999. During the period until November, 1999, detailed commissioning tests and calibrations were performed. There has been no substantial problem from electrical breakdown of high voltage connectors submerged in light water since nitrogen was added to the degassed water. During the period before November, a variety of adjustments were made to improve the light sensitivity by about 25% and to reduce the trigger threshold to about 2 MeV. ^{222}Rn in the air above the heavy water was reduced to acceptable levels by flushing with boil-off gas from liquid nitrogen. As of November, 1999, the desired detector specifications had been met, the detector parameters were frozen and production data accumulation was started, interspersed with a variety of calibration measurements. The detector performance has been very good, with more than 98.5% of all channels operational; a total event rate of less than 5 Hz above a threshold of about 20 hit PMT's; PMT individual noise rates of less than 500 Hz for a threshold of about 0.3 photoelectrons, providing fewer than 2 noise hits per event.

3. CALIBRATION

Detector calibration is being carried out with a variety of techniques and sources. Electronic calibrations of pedestals, slopes and timing are performed regularly with pulsers. The 600,000 electronic constants are very stable. Optical properties of the detector have been studied using a diffusing ball, (Laserball) receiving light from a pulsed laser system providing wavelengths between 337 and 700 nm with variable intensity at repetition rates from near 0 to 45 Hz. A nearly mono-energetic ^{16}N gamma ray source has also been deployed.

Figure 2 shows a spectrum from the ^{16}N source compared with a Monte Carlo simulation, using optical parameters extracted from a preliminary analysis of the laserball data. A single constant corresponding to the average quantum efficiency of the PMT's has been adjusted to match the centroid of these spectra. A further comparison of centroids for over 20 other locations throughout the D_2O volume showed less than 2% difference between the data and the simulation at any point. An acrylic- encapsulated ^{242}Cf fission neutron source has also been deployed to study the neutron response of the detector.
Other sources being prepared include a 19.8 MeV gamma source produced by the (p,t) reaction, a triggered source for the ^{232}Th and ^{238}U chains producing 2.6 and 2.4 MeV gammas and a source of ^{8}Li, emitting betas up to 13 MeV.

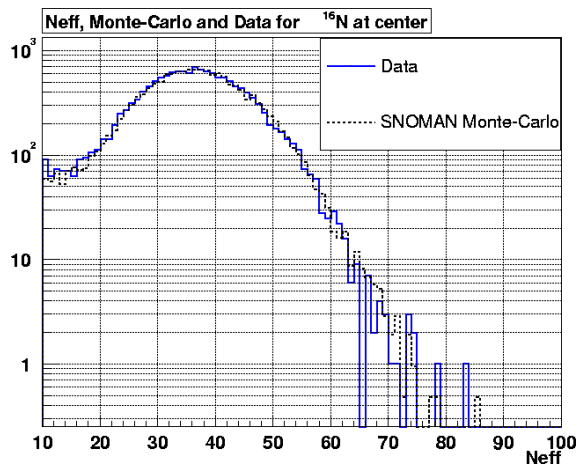

Figure 2. Data from the ^{16}N source compared with Monte Carlo simulation. Neff is the number of PMTs hit by prompt light less the average number of noise hits.

4. OBSERVATIONS TO DATE

In addition to Cerenkov light produced by neutrinos and radioactivity, there can be other sources of "instrumental light" arising from parts of the detector. For example, it is well known that PMT's can occasionally emit light, perhaps through internal electrical discharges. Light from these sources has very different characteristics from the typical patterns observed for Cerenkov light at solar neutrino energies. The light from a flashing PMT shows an early trigger for the flashing PMT, followed by light observed across the detector, at least 70 ns later. For SNO, six or more electronic channels surrounding the flashing PMT typically show pickup signals, distinguishing the events further from Cerenkov events.
Figure 3 shows the raw spectrum of events (solid line) observed with the detector for a fraction of the data obtained since the start of data taking in November, 1999. The events are plotted against NHIT, the number of PMT's contained in a 400 ns second window surrounding the detector trigger (more than about 20 PMT's hit within a 100 ns window). NHIT is approximately proportional to the electron energy for a Cerenkov event, with about 9 NHIT corresponding to 1 MeV. Only a fraction of the data have been shown as the remainder are being saved for a comparison after the cuts have been fully defined.

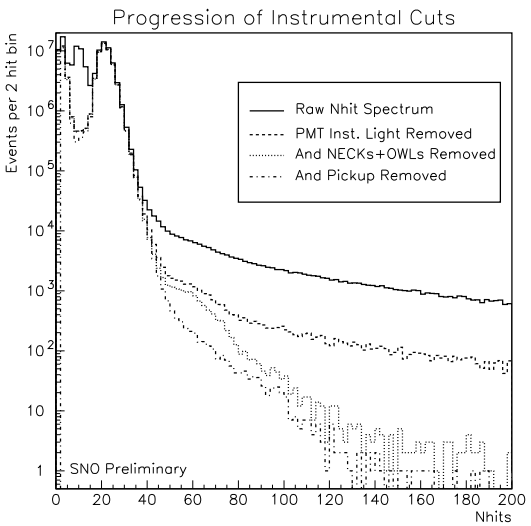

Figure 3. Progression of instrumental cuts.

The dashed line shows the residual data after cuts have been imposed to remove events that show characteristics matching the Flashing PMT's. The dotted line shows the residual data after further cuts are imposed to remove another class of events associated with bursts of light from the neck region of the detector. These events may arise from static discharges of insulating materials. Four additional PMT's were installed in this region in September, 1999. They clearly observe these events and are very insensitive to light generated in the detector itself, as determined from the calibration sources. The dot and dash line shows the residual events after the imposition of further cuts which eliminate events that show characteristics of pickup in the electronic systems.

Two separate groups within the SNO Collaboration developed a series of cuts to eliminate these instrumental light sources and their results for the residual spectrum were virtually identical, lending confidence in the robustness with which these events can be distinguished from neutrinos. To ensure that these cuts do not remove a significant number of neutrino events, the fraction of signal loss was tested with the ^{16}N source. The results are shown in Figure 4, indicating very low loss of signal in the region tested.

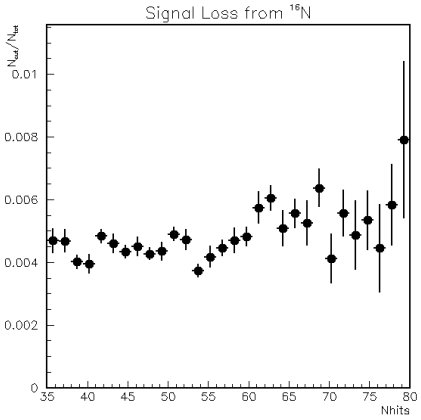

Figure 4. Signal loss as measured with ^{16}N.

Following these cuts, algorithms based on timing and spatial information were used to reconstruct the position and direction of the events. Figure 5 shows the resulting spectrum for a large fiducial volume.

Superimposed on the data is the simulated spectrum for the CC reaction in Figure 1, scaled to the data. As the calibrations are not yet complete, the SNO collaboration has chosen not to quote a number for the flux of electron neutrinos measured by the CC reaction on deuterium. However, it should be apparent from the figure that the spectrum is well defined so that an accurate measurement will be obtained when further calibrations have been completed.

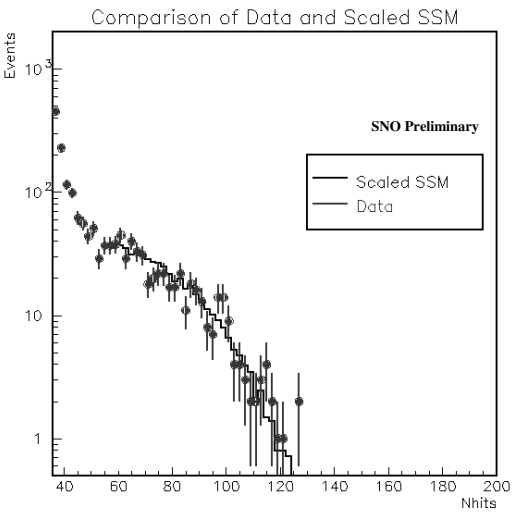

Figure 5. Distribution of events versus number of hit PMTs.

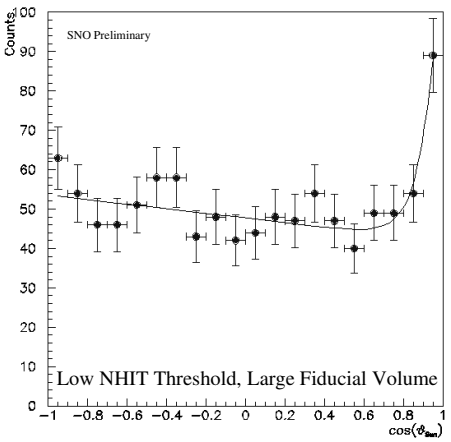

Figure 6. Distribution of events versus cos θ_{sun}.

Figure 6 shows events as a function of the direction to the sun for a lower energy threshold and a larger fiducial volume. Even with somewhat more radioactive background included by these parameter choices, the peak at $cos\theta_{sun} = 1$ from the ES reaction is apparent.

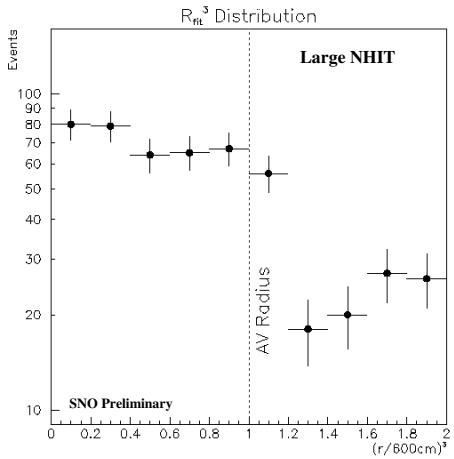

Figure 7. Distribution of events versus radius cubed.

Figure 7 shows the distribution of events as a function of $(radius/600cm)^3$, for a high energy threshold. The radius of the AV is 600 cm, so the heavy water volume corresponds to values less than 1. It is apparent that there is a clear excess of events in this region, indicating the substantial contribution from the CC reaction on deuterium.

5. RADIOACTIVE BACKGROUNDS

Radioactive backgrounds which contribute to the Cerenkov light in the detector arise from the decay chains of ^{238}U and ^{232}Th impurities in the water and other detector materials. At low energies, the dominant contributions come from impurities in the water. These contributions can be measured through the radioassay of the light and heavy water. They can also be measured independently through observation of the low energy region of the Cerenkov spectrum for events reconstructing in the water regions. Sensitive techniques have been developed for radioassay of ^{224}Ra, ^{226}Ra and ^{222}Rn in the water. The measurements for Ra are performed by extracting the Ra on beads coated with manganese oxide or on ultrafiltration membranes coated with hydrous titanium oxide. After sampling hundreds of tonnes of water, these materials are measured for radioactive decay of the Ra with techniques sensitive to tens of atoms. (see reference[1] for more details) The ^{222}Rn is measured by degassing 50 or more tonnes of water and collecting the Rn gas with liquid nitrogen-cooled traps. The collected gas is then counted with ZnS coated scintillation cells (Lucas cells) to observe the alpha decays. These techniques have been employed to make very sensitive measurements of the water, as shown in Figure 8.

The Cerenkov light generated by the Th and U radioactivity can be observed at low energies as illustrated in figure 1 and observed in figures 3 and 5. As the decay products and sequence are different for the two chains it is also possible to use pattern recognition to obtain a statistical separation of the contributions from the two chains. Future calibrations will include the use of proportional counters containing Th and U chain sources to provide triggered events to calibrate the detector response in this region. However, the data to date, with large calibration uncertainties, do agree with the radioassay measurements. The light water in the SNO detector is designed to attenuate higher energy gamma rays (fission and alpha-induced) from radioactivity in the cavity walls and the PMT support structure. High energy events reconstructed in the light water volume outside the AV are found to be predominantly inward going and the numbers decrease rapidly as a function of radius. Using calibration data from the ^{16}N source positioned near the PMT's, extrapolations of the number of high energy gammas interacting within the D_2O volume indicate that fewer than a few percent of the events above NHIT = 60 in Figure 5 arise from

external high energy gammas. In addition to the contributions to Cerenkov light, the presence of Th and U chain elements can produce a background for the NC reaction through the photodisintegration of deuterium by 2.6 MeV gammas from the Th chain and 2.4 MeV gammas from the U chain. The horizontal lines in Figure 8 individually represent contributions to the neutron background in the detector from photodisintegration equivalent to 5% of the signal expected for the NC reaction for the neutrino flux[2] of BP98. As is apparent from the figure, these goals have been met for the U chain and are met within a factor of two for the Th chain.

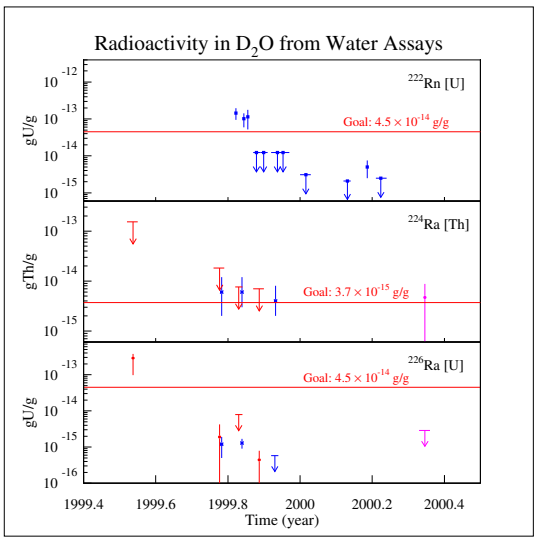

Figure 8. Measurements of Radium from the Th and U chains and Radon from the U chain in D_2O.

6. CONCLUSIONS

Based on energy, direction and location information, the data in the regions of interest in Figures 5 to 8 appear to be dominated by ^8B solar neutrino events observed with the CC and ES reactions, with very little background. This implies that measurements during the pure heavy water phase will provide an accurate measurement of the electron neutrino flux via the CC reaction after completion of further calibrations. The measurements of radioactivity imply that the NC measurements can be made with only a small uncertainty from the radioactive background.

7. Acknowledgments

This research has been financially supported in Canada by the Natural Sciences and Engineering Research Council, Industry Canada, National Research Council of Canada, Northern Ontario Heritage Fund Corporation and the Province of Ontario, in the United States by the Department of Energy, and in the United Kingdom by the Science and Engineering Research Council and the Particle Physics and Astronomy Research Council. Further support was provided by INCO, Atomic Energy of Canada Limited (AECL), Agra-Monenco, Canatom, Canadian Microelectronics Corporation and Northern Telecom. The heavy water has been loaned by AECL with the cooperation of Ontario Hydro. The provision of INCO of an underground site is greatly appreciated.

REFERENCES

1. J. Boger et al, Nucl.Instrum.Meth. A449 (2000) 172-207.
2. J.N. Bahcall, S. Basu and M. H. Pinsonneault, Phys. Lett. B433 (1998) 1.
3. L. Wolfenstein, Phys. Rev. D17 (1978) 2369; S.P. Mikheyev and A.Y. Smirnov, Sov. Jour. Nucl. Phys. 42 (1985) 913.

[a] For a complete list of the SNO Collaboration please see Ref. [1].